


SK-P461/M844AI

Features

- ▶ 40M range visible in total darkness with 4pcs of IR LEDs
- ▶ Weather-proof (IP66)
- ▶ 3-Axis Bracket for 3D(Pan/Tilt/Roll) rotation
- ▶ Split Glass Technology
- ▶ Using IR Lens to prevent defocusing (F1.2)
- ▶ All controls hidden behind an easy access door



Demension

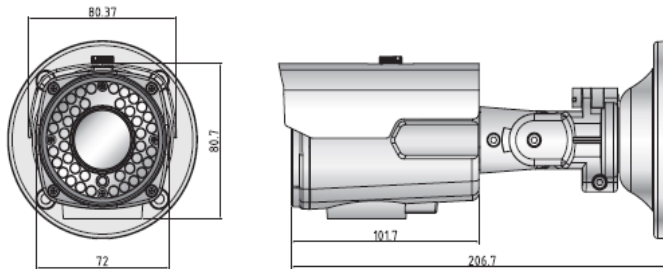

Specifications

MODEL	SK-P441D/M844AI
Image Sensor	1/3" COLOR SONY SUPER HAD CCD II
Pixel	410K
Scanning System	2:1 Interlace
Sync. Type	Internal
Resolution	600 TV-Line (Color), 700TV-Line (B/W)
S/N Ratio	52 dB or More (AGC off)
Video Output	1.0 Vp-p(Sync. Negative) Termination 75Ω
Min. Illumination	0 Lux (30M RANGE at LED ON) - Indoor 0.01 Lux (F/1.2), 0.0003 Lux(Sense up)
Gamma	Y=0.45 typ. (0.45, 0.6, 1.0 user)
White Balance	ATW(2,500°K ~ 9,500°K)/MANUAL/AWC
Shutter Speed	1/60 (1/50) ~ 1/100,000sec
Sense up	Auto (Selectable Limit 2X ~256X) FIXED / OFF
Backlight	BLC, LWDR, DWDR, HLC, OFF
AGC	LOW / MODDLE / HIGH / OFF
Day & Night	AUTO, COLOR, BW (Option: ICR)
LED	IR LED 40EA, Dynamic IR
LENS	Vari-focal auto iris lens
Power Supply	Regulated 12V DC
DIS	ON / OFF
Digital Zoom	ON(10X) / OFF
Current Consumption	Max. 850A : LED ON
Operation Temp.	(-)10°C ~ 50°C
Preservation Temp.	(-)20°C ~ 60°C
Dimention	61.5(W) x 61.5(H) X 102(D) mm
Weight	Approx. 900g