

Dome Camera/IP/Network Products

DOME CAMERA

IP66-rated
Waterproof & Vandalproof
Casing



SS-V2001HR5-OD
SS-V2041HR5-OD
Piano Camera Series

Pixim/Sharp/Sony Chipset optional with 650TVL
Pixim Seawolf D8800C with WDR 120dB, D/N Selection, WDR control
Sony/Sharp with RJ10, function with Smart LED, D-WDR, Mirror, Sharpness, HLC,
LSC(Lens Shading Compensation), 11 Languages, DPC(Defect Pixel Compensation)
4 Areas Motion detection, 8 Areas Privacy Masking, 512times Sens-up
Infrared LED optional with 17EA LED 20 Meters IR Distance
4-9mm/2.8-1.2mm Manual VF Lens / 4-9mm/2.8-1.2mm DC ICR Lens optional
IP66-rated waterproof and vandalproof casing, DC12V/AC24V 260mA
OEM Color with Silver, White and Black optional



IP/NETWORK PRODUCTS



- H.264 Main Profile@Level 3.0 , MPEG-4, M-JPEG, JPEG video encoding compression
- High-performance Build in 3A (AWB, AF, AE)
- 2.8/3.6 mm Fixed Lens, Support Color/BW mode converting, IR-CUT Filter
- 12 Pcs of IR LED lights, IR working distance: 5-10m
- Support 2.0 Mega Pixel: 1920*1080, Support 45 FPS @ 1280*720, 30 FPS@ 1920*1080 resolution real-time encoding
- Can support 10 viewer to access concurrently
- Support triple encoding streams
- Support bi-directional and broadcasting real time audio transmission
- Support network self-adapting technology to adjust video frame rate automatically according to the network bandwidth
- Support privacy protection mode , video loss detection, motion detection and sensor alarm functions
- Auto-retrieve function and auto-connection network



- Model NO.: SS-IP01/IP02/IP130/IP200
- Sony CCD or OV CMOS optional, 1.3Mpixel/2.0Mpixel/ D1 Resolution optional
 - Embedded System: Hisilicon 3512; ARM9, 32 bit RISC; 16MB Flash; 128MB Memory
 - Mobile Monitoring OS: Windows Mobiles 6.0 or above / Symbian S60 3rd and 5th / Iphone
 - 1 CH CVBS Video loopback output / 1CH Mic input and 1CH linear output
 - Support H.264/MJPEG video encoding, dual-stream, high compression ratio
 - Embedded Web Server, support IE browser, user management, ONVIF protocol support
 - Support SD Card Slot, 3G, Wifi and POE function optional



- H.264 Main Profile@Level 3.0 , MPEG-4, M-JPEG, JPEG video encoding compression
- High-performance Build in 3A (AWB, AF, AE)
- 4-9mm Manual Varifocal Lens, Support Color/BW mode converting, IR-CUT Filter
- 24 IR LED lights, IR working distance: 10-20m
- Support 3.0 Mega Pixel: 2048*1536, Support 45 FPS @ 1280*720, 30 FPS@ 1920*1080 resolution real-time encoding
- Can support 10 viewer to access concurrently
- Support triple encoding streams
- Support bi-directional and broadcasting real time audio transmission
- Support network self-adapting technology to adjust video frame rate automatically according to the network bandwidth
- Support privacy protection mode , video loss detection, motion detection and sensor alarm functions
- Auto-retrieve function and auto-connection network



- H.264 Main Profile@Level 3.0 , MPEG-4, M-JPEG, JPEG video encoding compression
- High-performance Build in 3A (AWB, AF, AE)
- 4-9mm/2.8-12mm Manual Varifocal Lens, Support Color/BW mode converting, IR-CUT Filter
- 42 IR LED lights, IR working distance: 30-40m
- Support 3.0 Mega Pixel: 2048*1536, Support 45 FPS @ 1280*720, 30 FPS@ 1920*1080 resolution real-time encoding
- Can support 10 viewer to access concurrently
- Support triple encoding streams
- Support bi-directional and broadcasting real time audio transmission
- Support network self-adapting technology to adjust video frame rate automatically according to the network bandwidth
- Support privacy protection mode , video loss detection, motion detection and sensor alarm functions
- Auto-retrieve function and auto-connection network

DVR

SS-D1104A/D1108A



- 4/8 Channel Standalone DVR
- Linux Operation system, H.264 Compression/AVI
- Record Frame Rate Support D1/HD1/CIF
- Remote Client, IE Brower, Mobile, CMS, Alarm
- RS485, VGA, SATA 2.6*1 (1*HDD 2TB)
- 2*USB2.0, USB Disk up to 32G, Removable DVD-RW

SS-D2204A-S/D2208A-S/D3216A-S



- 4/8/16 Channel Standalone DVR
- Linux Operation system, H.264 Compression/AVI
- Record Frame Rate Support D1/HD1/CIF
- Remote Client, IE Brower, Mobile, CMS, Firefox, Google Chrome, Mac Safari
- Talk Back, Loop Out, RS485, VGA, SATA 2.6*1 (2*HDD 2TB)
- 2*USB2.0, USB Disk up to 32G, DVD±RW, SD Card up to 32GB
- 3G Device Win Mobile 5.0/6.0, Symbian, PDA, Blackberry, Iphone (recommended)

SS-D2104A-A/D2108A-A/D2116A



- 4/8/16 Channel Standalone DVR
- Linux Operation system, H.264 Compression/AVI
- Record Frame Rate Support D1/HD1/CIF
- Remote Client, IE Brower, Mobile, CMS, Firefox, Google Chrome, Mac Safari
- Talk Back, RS485, VGA, SATA 2.6*1 (2*HDD 2TB)
- 2*USB2.0, USB Disk up to 32G, Removable DVD-RW

SS-D2104B/D2108B/D2116B



- 4/8/16 Channel Standalone DVR
- Linux Operation system, H.264 Compression/AVI
- Record Frame Rate Support D1/HD1/CIF
- Remote Client, IE Brower, Mobile, CMS, Firefox, Google Chrome, Mac Safari
- Talk Back, RS485, VGA, SATA 2.6*1 (2*HDD 2TB)
- 2*USB2.0, USB Disk up to 32G, Removable DVD-RW

SS-D4408A/D4416A



- 8/16 Channel Standalone DVR Linux Operation system, H.264 Compression/AVI
- Record Frame Rate Support D1/HD1/CIF
- Remote Client, IE Brower, Mobile, CMS, Firefox, Google Chrome, Mac Safari
- Talk Back, Loop Out, RS485, VGA, SATA 2.6*1 (4*HDD 2TB)
- 2*USB2.0, USB Disk up to 32G, DVD±RW, SD Card up to 32GB
- 3G Device Win Mobile 5.0/6.0, Symbian, PDA, Blackberry, Iphone (recommended)
- HD VGA Output; HDMI 1080P Output optional

SS-D5508A/D5516A/D5532A



- 8/16/32 Channel D1 Standalone DVR Linux Operation system, H.264 Compression/AVI
- Record Frame Rate Support D1/HD1/CIF
- 2 CH BNC; HD VGA Output; HDMI 1080P Output optional
- Remote Client, IE Brower, Mobile, CMS, Firefox, Google Chrome, Mac Safari
- Talk Back, Loop Out, RS485, VGA, SATA 2.6*1 (8*HDD 2TB)
- 2*USB2.0, USB Disk up to 32G, DVD±RW, SD Card up to 32GB
- 3G Device Win Mobile 5.0/6.0, Symbian, PDA, Blackberry, Iphone (recommended)

2012 PRODUCT LEAFLET

Security Products
PRODUCTS INFORMATION



SECRETS OF SYSTEMS

P.O. Box: 104305, Riyadh, 11626 Kingdom of Saudi Arabia
Http://www.ssesa.com • Tel: +966 1 2493221 • Fax: +966 1 2493220 • Email: Sales@ssesa.com

New Products

Another Eye Guarding the world

SS-W1104

- Sony/PIXIM Seawolf Chipset optional
- 48EA+2EA Array LED with 80~100M IR Distance
- 5-50mm or 3.6-16mm Daiwon(For Pixim) Lens
- OSD with ATR, 2D-DNR, 8 Privacy Masks
- IP67-rated waterproof and Lightning-prddf



SS-1141SNH-4

- 1/3" Sony Effio-E 960H Exview CCD700TVL
- 36EA IR LED with 30M IR Distance
- Built-in 4-9mm lens with 0 Lux when LED on
- OSD optional and IP66-rated waterproof standard
- Matched ALL-Oriented Bracket, Voltage with DC12V
- OEM Color with Black and White



SS-W118SNH-3NVP

- 1/3" Sony Color CCD, 600TVL
- 3.6 MM Daiwon Fixed lens
- Infrared LED: 24EA, IR Distance: 20-30Meters
- Waterproof IP67, Anti-Thunder Design



SS-67SN

- 1/3" Sony Super-Had CCD 420TVL
- 3.6 MM Fixed lens
- Infrared LED: 36EA IR Distance: 30Meters
- Waterproof IP67



SS-B602SNH-3NVP

- 1/3" Sony Super-Had CCD 600TVL
- OSD, 2D-DNR, D-WDR



SS-D206SNH-3NVP-OSD

- 1/3 SONY Color CCD 600TVL
- OSD, 2DDNR, D-WDR, IR-SMART
- 4~9mm Manual varifocal lens
- Infrared LED: 17EA, IR Distance: 20Meters



SS-D201SN

- 1/3" Sony Super-Had CCD 420TVL
- 3.6 MM Fixed lens
- Infrared LED: 22EA, IR Distance: 20Meters
- With Audio



PTZ

High Speed Dome Camera

THE MOST STRICTEST QUALITY CONTROL

-40°C~+60°C

The Best IP67 Standard



FEATURES

SS-NP6061

- Indoor/Outdoor Intelligent High Speed Dome
- Support 256 presets, 32-bit software address
- 32-bit ARM processor CPU, User management protection
- 8 mission planning and 8 Editable vector path
- 6 pattern (horizontal/vertical/zoom, and each can record up to 120 seconds)
- Compatibility with all Protocol: PELCO-D, PELCO-P, ULTRACK, VICON, DYNACOLOR
- Compatible with Sony, Hitachi, CNB, Sanyo, Yoko, LG, Samsung
- Optional multi-language: (English, Chinese, German, French, Russian, Italian, Spanish) and default with two languages selected by customers.
- Operating Temperature: with -40°C~+60°C .Heating device active with 6°C, off with 14°C



SS-NP6121

- Indoor/Outdoor Intelligent High Speed Dome
- Support 256 presets, 32-bit software address
- 32-bit ARM processor CPU, User management protection
- 8 mission planning and 8 Editable vector path
- 6 pattern (horizontal/vertical/zoom, and each can record up to 120 seconds)
- Compatibility with all Protocol: PELCO-D, PELCO-P, ULTRACK, VICON, DYNACOLOR
- Compatible with Sony, Hitachi, CNB, Sanyo, Yoko, LG, Samsung
- Optional multi-language: (English, Chinese, German, French, Russian, Italian, Spanish) and default with two languages selected by customers.
- Operating Temperature: with -40°C~+60°C .Heating device active with 6°C, off with 14°C



SS-NP6071

- Indoor/Outdoor Intelligent High Speed Dome
- Support 256 presets, 32-bit software address
- 32-bit ARM processor CPU, User management protection
- 8 mission planning and 8 Editable vector path
- 6 pattern (horizontal/vertical/zoom, and each can record up to 120 seconds)
- Compatibility with all Protocol: PELCO-D, PELCO-P, ULTRACK, VICON, DYNACOLOR
- Compatible with Sony, Hitachi, CNB, Sanyo, Yoko, LG, Samsung
- Optional multi-language: (English, Chinese, German, French, Russian, Italian, Spanish) and default with two languages selected by customers.
- Operating Temperature: with -40°C~+60°C .Heating device active with 6°C, off with 14°C



SS-NP6131

- Indoor/Outdoor Intelligent High Speed Dome
- Support 256 presets, 32-bit software address
- 32-bit ARM processor CPU, User management protection
- 8 mission planning and 8 Editable vector path
- 6 pattern (horizontal/vertical/zoom, and each can record up to 120 seconds)
- Compatibility with all Protocol: PELCO-D, PELCO-P, ULTRACK, VICON, DYNACOLOR
- Compatible with Sony, Hitachi, CNB, Sanyo, Yoko, LG, Samsung
- Optional multi-language: (English, Chinese, German, French, Russian, Italian, Spanish) and default with two languages selected by customers.
- Operating Temperature: with -40°C~+60°C .Heating device active with 6°C, off with 14°C



Beyond Your Imagination..




Infrared Pan-Tilt IP Camera SS-ND103AN1-SM




Features

- Indoor infrared PT robot wireless IP camera
- Simple to setup, friendly GUI, DIY installation
- H.264 video compression format,, enhances 2.2 times of image quality and reduces 40% network bandwidth
- Dual encoding streams supported, VGA, QVGA, CIF, QCIF, QQVGA selectable
- High image&video quality, Two way audio monitoring
- With audio jack, can output the audio to a speaker
- TF card optional for local storage
- Support Iphone, Blackberry, Android, Symbian, Windows Mobile remote
- surveillance anywhere anytime
- Motion detection alert via email or upload image to FTP
- 1 channel alarm input and 1 channel alarm output optional
- PT control (Horizontal angle 270°; Vertical angle 90°)
- Free DDNS for Remote viewing
- Support UPNP, RTSP protocol
- Support VLC, Quick time player
- Support WIFI: 802.11b/g wireless networking (optional)
- Support both WEP & WPA WPA2 encryption for wireless security
- Support image snapshot
- Support IE, Safari, Firefox, Google chrome
- Auto IR-LED illumination for night vision

System Connection

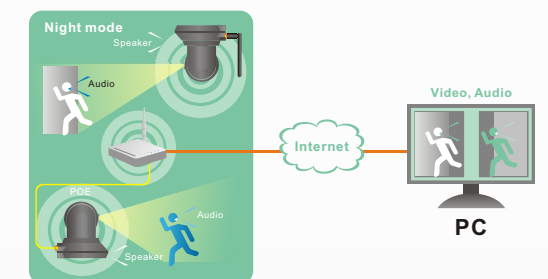

Application

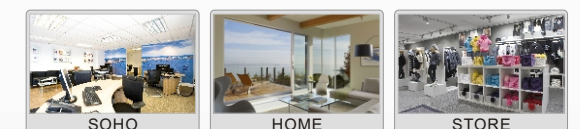

SECRETS OF SYSTEMS

Http://www.ssesa.com
Email: Sales@ssesa.com
Tel: +966 1 4938221 Fax: +966 1 493220
P.O. Box: 104305, Riyadh, 11626 Kingdom of Saudi Arabia

